


TILTABLE PIPE ROTATOR SPECIFICATIONS

MODEL	W-TRP 12	W-TRP 24	W-TRP 40
Pipe Capacity	1" - 12"	2" - 24"	4" - 40"
Weight Capacity	2200 lbs	4400 lbs	6800 lbs
Max Turning Speed Per Min	47	40	30
Tilting Angle	Up to + or - 45°		
Turning / Tilting / Lifting Motors	0.5HP / 1HP / 1HP	2HP / 1HP / 1HP	2HP / 2HP / 2HP
Dimensions (L x W x H)	54" x 56" x 65"	69" x 60" x 83"	69" x 60" x 95"

RMT Pipe Rotator with Clamping Roller System has significant advantages over traditional devices:

- They can be used for pipes with elbows, tee pieces, or other offset loads.
- A wide range of pipes can be clamped. The infinitely variable rotary speed is not affected by the size of a pipe because of its separate drive unit.
- Quick, precise centering and clamping without chuck, clamping shoe, etc.
- Flexible pipe handling - pipe can be clamped at its center of gravity.
- Tilting movements and supports are irrelevant in most cases.
- It is possible to center two pipes with the same diameter.
- Various combinations are possible - e.g. clamping and driving of a main spindle.

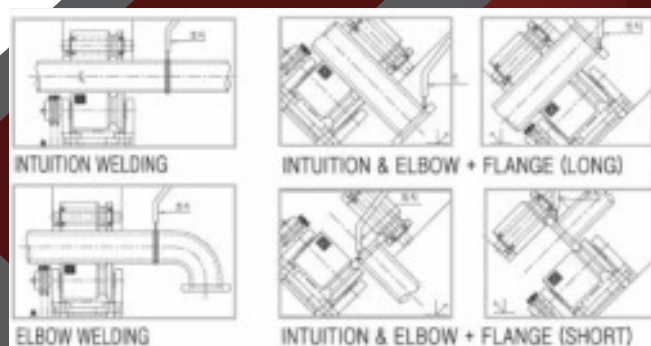



Hydraulic Presses




Fiber Lasers



PSM Pipe Lathe



Press Brakes




Shears




Ironworkers



Plate Rolls




Angle Rolls



Bandsaws



Dishing Presses



Flanging Machines



Drilling Machines

"If you need a machine and don't buy it, you'll find that you have paid for it anyway, but don't have it."

Henry Ford

Revolution Machine Tools
385 N 700 W
North Salt Lake, UT 84054

www.RMTUS.com
info@rmtus.com

Phone: 844.RMT.INFO
844.768.4636

KYSON

844-768-4636 / www.RMTUS.com